1 - 2026 US OPEN PATTERN 1

KEGEL
BUILT FOR BOWLING®

DISTANCE:	40 FEET	**VOLUME:**	31 mL
RATIO:	1.84:1	**FORWARD:**	19.45 mL
DROP BRUSH:	34 FEET	**REVERSE:**	11.55 mL
TANKS:	CURVE	**PUMP:**	50µL

ZONE	3L-7L : 18L-18R OUTSIDE TRACK : MIDDLE	8L-12L : 18L-18R MIDDLE TRACK : MIDDLE	13L-17L : 18L-18R INSIDE TRACK : MIDDLE	18L-18R MIDDLE	18L-18R : 17R-13R MIDDLE INSIDE : TRACK	18L-18R : 12R-8R MIDDLE MIDDLE : TRACK	18L-18R : 7R-3R MIDDLE OUTSIDE : TRACK	ZONE
RATIO	1.72	1.22	1.03	1.00	1.02	1.21	1.84	RATIO
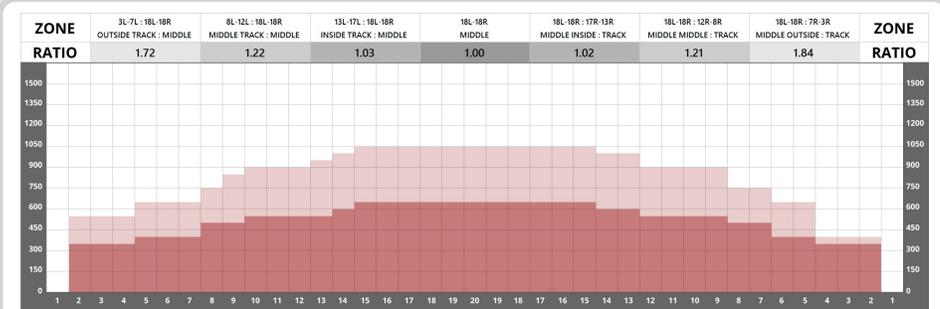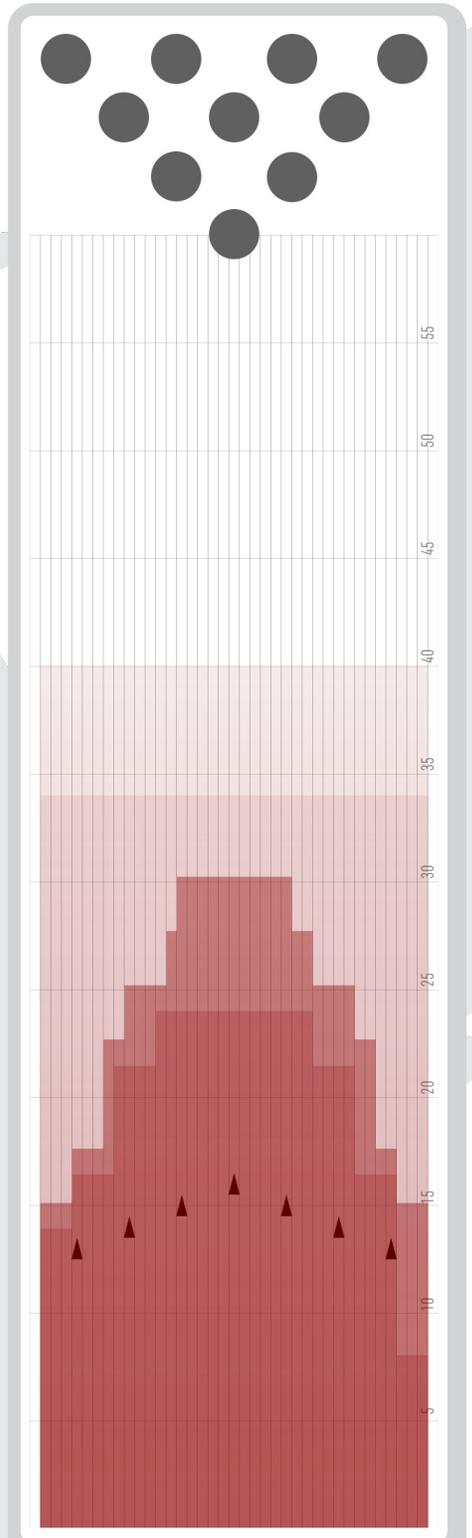
FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	7	50	18	500	A - CURVE	0 → 15	12,950
2	5L	5R	1	50	18	500	A - CURVE	15 → 18	1,550
3	8L	7R	2	50	18	500	A - CURVE	18 → 23	2,600
4	10L	9R	1	50	18	500	A - CURVE	23 → 25	1,100
5	14L	13R	1	50	18	500	A - CURVE	25 → 28	700
6	15L	15R	1	50	18	500	A - CURVE	28 → 30	550
7	2L	2R	0	50	26	500	A - CURVE	30 → 40	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	50	30	500	A - CURVE	34 → 24	0
2	13L	13R	1	50	18	500	A - CURVE	24 → 21	750
3	9L	9R	2	50	18	500	A - CURVE	21 → 16	2,300
4	5L	5R	1	50	18	500	A - CURVE	16 → 14	1,550
5	2L	5R	3	50	14	500	A - CURVE	14 → 8	5,100
6	2L	2R	1	50	14	500	A - CURVE	8 → 6	1,850
7	2L	2R	0	50	14	500	A - CURVE	6 → 0	0

THIS PATTERN IS DESIGNED FOR:
REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

Created Mar 01, 2026 - Rendered for Atlas Pro.