3 - 2026 US OPEN PATTERN 3

KEGEL
BUILT FOR BOWLING

DISTANCE:	**35 FEET**	**VOLUME:**	**29.41 mL**
RATIO:	**1.36:1**	**FORWARD:**	**29.41 mL**
DROP BRUSH:	**29 FEET**	**REVERSE:**	**0 mL**
TANKS:	**GLIDE**	**PUMP:**	**MULTI**

ZONE	3L-7L : 18L-18R OUTSIDE TRACK : MIDDLE	8L-12L : 18L-18R MIDDLE TRACK : MIDDLE	13L-17L : 18L-18R INSIDE TRACK : MIDDLE	18L-18R MIDDLE	18L-18R : 17R-13R MIDDLE INSIDE : TRACK	18L-18R : 12R-8R MIDDLE MIDDLE : TRACK	18L-18R : 7R-3R MIDDLE OUTSIDE : TRACK	ZONE
RATIO	1.17	1.00	1.00	1.00	1.00	1.00	1.36	RATIO
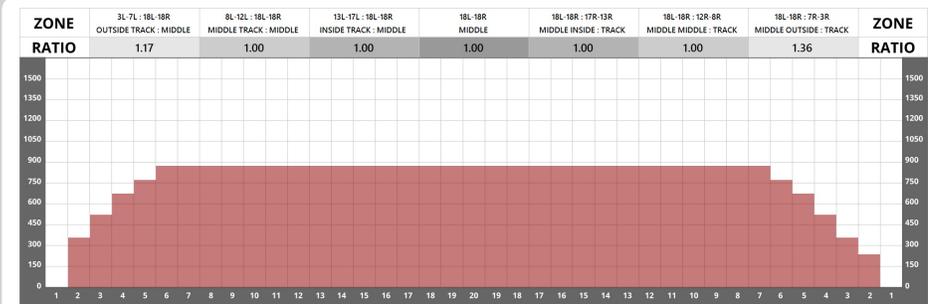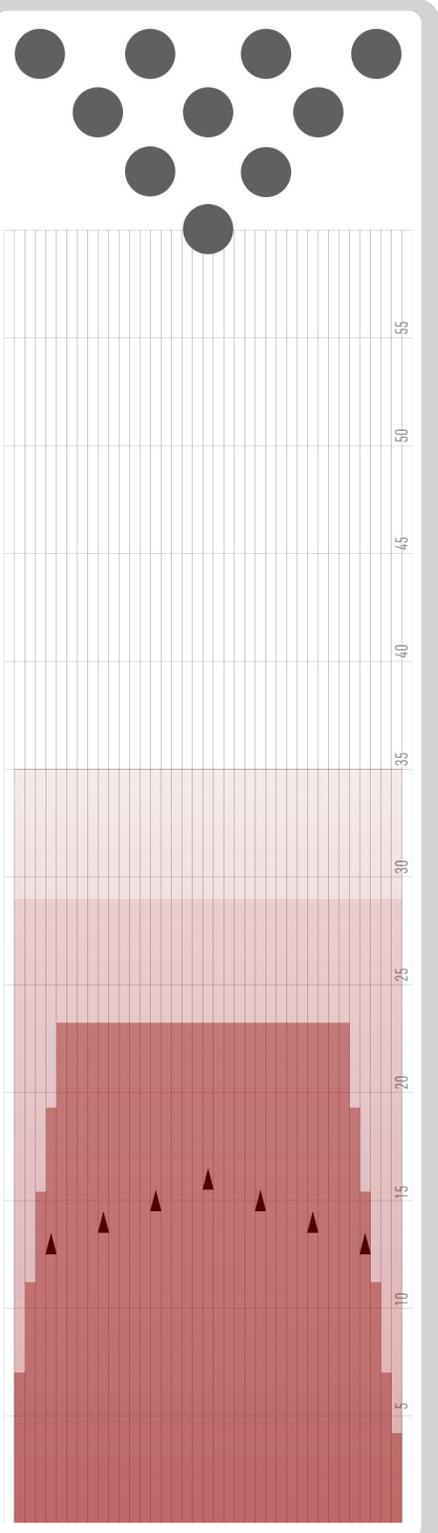
FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	4	60	10	500	B - GLIDE	0 → 4	8,880
2	2L	3R	2	60	10	500	B - GLIDE	4 → 7	4,320
3	3L	4R	3	55	10	500	B - GLIDE	7 → 11	5,610
4	4L	5R	3	50	10	500	B - GLIDE	11 → 15	4,800
5	5L	6R	2	50	14	500	B - GLIDE	15 → 19	3,000
6	6L	7R	2	50	14	500	B - GLIDE	19 → 23	2,800
7	2L	2R	0	50	18	400	B - GLIDE	23 → 29	0
8	2L	2R	0	50	22	300	B - GLIDE	29 → 32	0
9	2L	2R	0	50	26	200	B - GLIDE	32 → 35	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	50	30	300	B - GLIDE	29 → 23	0
2	2L	2R	0	50	18	400	B - GLIDE	23 → 10	0
3	2L	2R	0	50	10	500	B - GLIDE	10 → 0	0

THIS PATTERN IS DESIGNED FOR:
VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

Created Mar 01, 2026 - Rendered for Atlas Pro.