2026 USBC MASTERS

DISTANCE:	41 FEET	**VOLUME:**	35.59 mL
RATIO:	1.87:1	**FORWARD:**	22.47 mL
DROP BRUSH:	39 FEET	**REVERSE:**	13.12 mL
TANKS:	GLIDE & ICE	**PUMP:**	MULTI

ZONE	3L-7L : 18L-18R OUTSIDE TRACK : MIDDLE	8L-12L : 18L-18R MIDDLE TRACK : MIDDLE	13L-17L : 18L-18R INSIDE TRACK : MIDDLE	18L-18R MIDDLE	18L-18R : 17R-13R MIDDLE INSIDE : TRACK	18L-18R : 12R-8R MIDDLE MIDDLE : TRACK	18L-18R : 7R-3R MIDDLE OUTSIDE : TRACK	ZONE
RATIO	1.81	1.07	1.00	1.00	1.00	1.07	1.87	RATIO
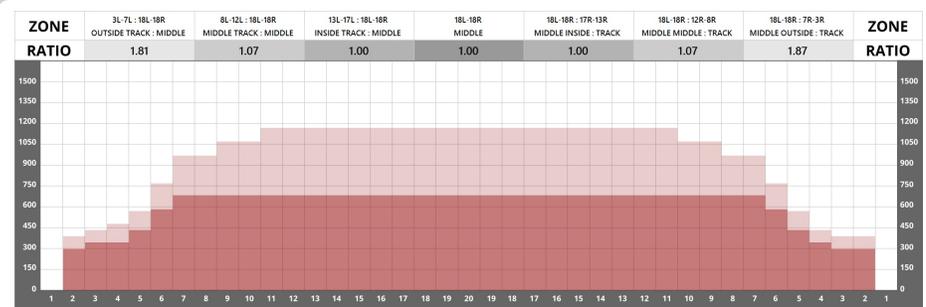
FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	5	50	14	500	A - GLIDE	0 → 8	9,250
2	3L	4R	1	45	14	500	B - ICE	8 → 10	1,530
3	5L	5R	2	45	14	500	B - ICE	10 → 14	2,790
4	6L	6R	3	50	14	500	A - GLIDE	14 → 20	4,350
5	2L	2R	1	50	18	500	A - GLIDE	20 → 22	1,850
6	7L	7R	2	50	18	500	B - ICE	22 → 27	2,700
7	2L	2R	0	50	18	500	B - ICE	27 → 32	0
8	2L	2R	0	50	18	350	B - ICE	32 → 38	0
9	2L	2R	0	50	22	150	B - ICE	38 → 41	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	50	30	500	B - ICE	39 → 28	0
2	11L	11R	2	50	18	500	B - ICE	28 → 23	1,900
3	9L	9R	2	50	18	500	B - ICE	23 → 18	2,300
4	7L	7R	2	50	14	500	B - ICE	18 → 14	2,700
5	6L	6R	1	50	14	500	B - ICE	14 → 12	1,450
6	4L	5R	1	45	14	500	B - ICE	12 → 10	1,440
7	2L	2R	2	45	14	500	A - GLIDE	10 → 6	3,330
8	2L	2R	0	50	10	500	B - ICE	6 → 0	0

THIS PATTERN IS DESIGNED FOR:
VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

Created Mar 22, 2026 - Rendered for Atlas Pro.