




U12G FINAL ADVANCERS (CEDARVALE LANES)



DISTANCE:	46 FEET	VOLUME:	26.04 mL
RATIO:	2.80:1	FORWARD:	16.72 mL
DROP BRUSH:	38 FEET	REVERSE:	9.32 mL
TANKS:	GLIDE & GLIDE	PUMP:	40 μ L

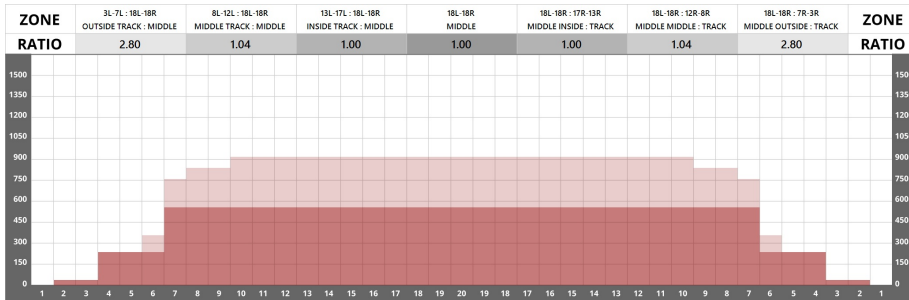

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	2L	2R	1	40	18	0 → 0	1,480
2	4L	4R	5	40	18	0 → 13	6,600
3	7L	7R	8	40	22	13 → 37	8,640
4	2L	2R	0	40	26	37 → 46	0


REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	2L	2R	0	40	30	38 → 37	0
2	2L	2R	0	40	22	37 → 25	0
3	10L	10R	2	40	14	25 → 21	1,680
4	8L	8R	2	40	14	21 → 17	2,000
5	7L	7R	2	40	14	17 → 13	2,160
6	6L	6R	3	40	14	13 → 7	3,480
7	2L	2R	0	40	10	7 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

Created Jun 16, 2026 - Rendered for Atlas.

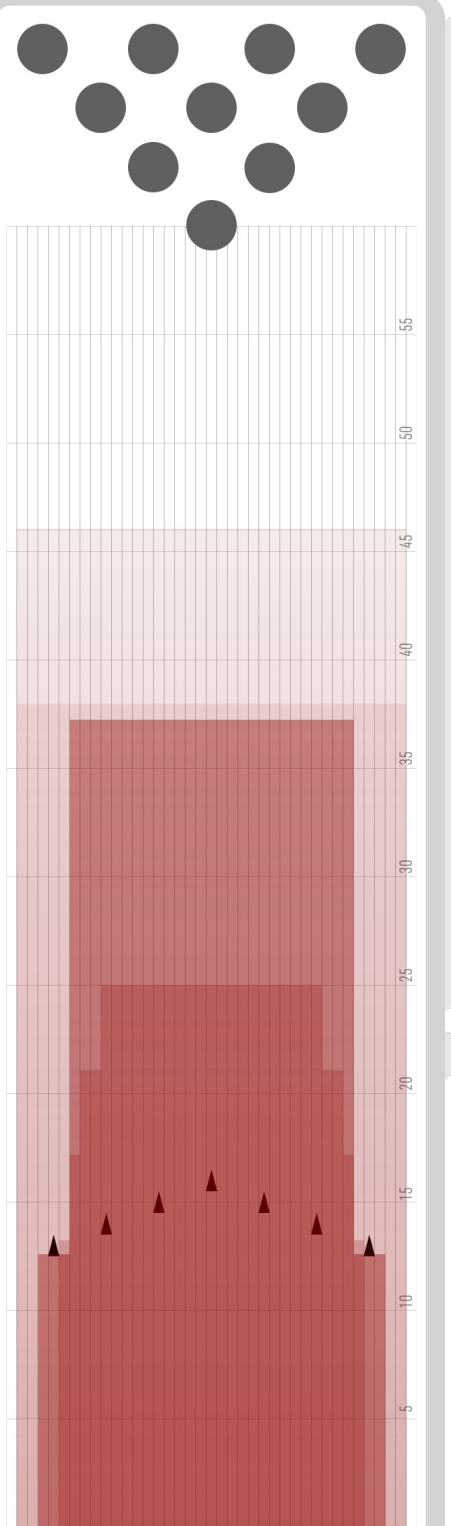

SCAN QR CODE FOR
MORE PATTERNS ON
KEGEL PATTERN
LIBRARY



KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET