




U14B ADVANCERS (MERMAID LANES)



DISTANCE:	35 FEET	VOLUME:	27.83 mL
RATIO:	1.60:1	FORWARD:	27.83 mL
DROP BRUSH:	32 FEET	REVERSE:	0 mL
TANKS:	GLIDE	PUMP:	55µL

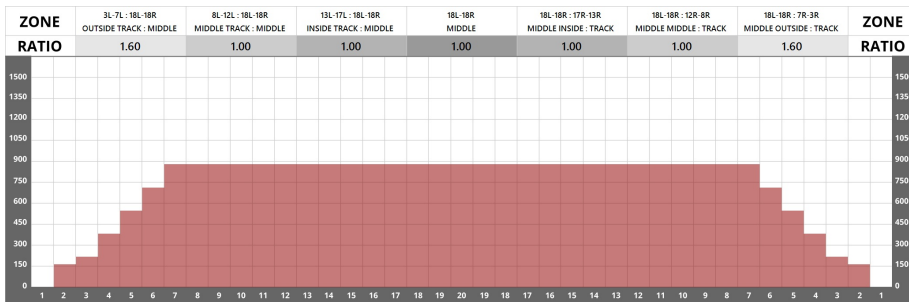

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	2L	2R	3	55	10	0 → 3	6,105
2	3L	3R	1	55	10	3 → 4	1,925
3	4L	4R	3	55	10	4 → 8	5,445
4	5L	5R	3	55	10	8 → 13	5,115
5	6L	6R	3	55	14	13 → 18	4,785
6	7L	7R	3	55	14	18 → 24	4,455
7	2L	2R	0	55	18	24 → 29	0
8	2L	2R	0	55	22	29 → 32	0
9	2L	2R	0	55	26	32 → 35	0

REVERSE LOADS DATA


#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	2L	2R	0	55	30	32 → 23	0
2	2L	2R	0	55	18	23 → 10	0
3	2L	2R	0	55	10	10 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | REVERSE DROP BRUSH

This pattern may require adjustments if using a lane machine that does not have these features

Created Jun 18, 2026 - Rendered for Atlas.

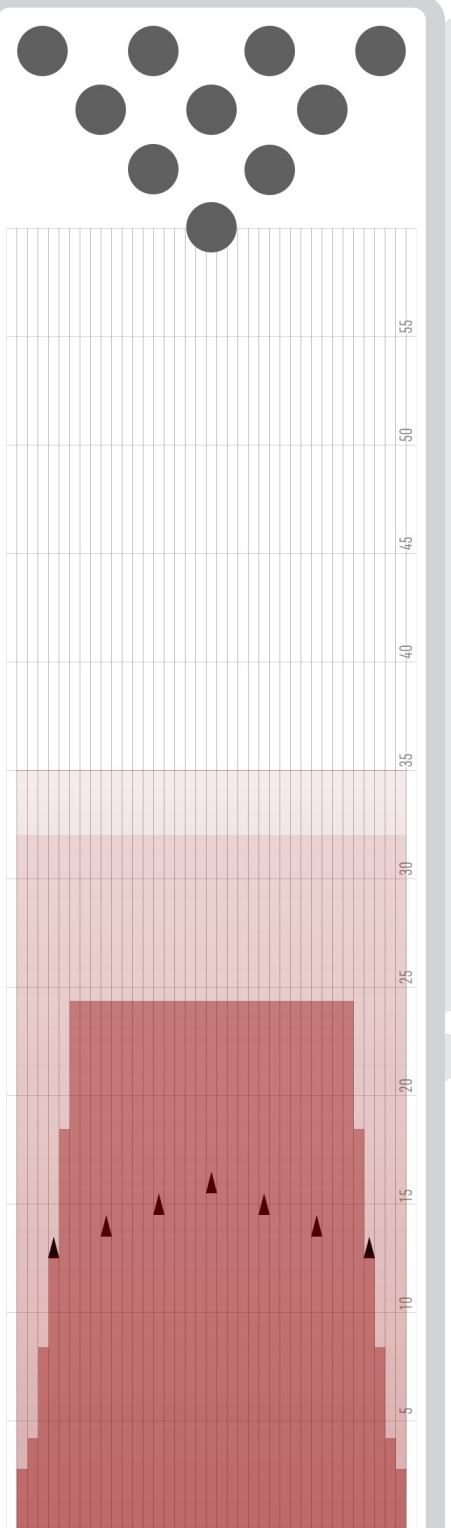

KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET



SCAN QR CODE FOR
MORE PATTERNS ON
KEGEL PATTERN
LIBRARY

