




U16G ADVANCERS (CONCORD LANES)



DISTANCE:	35 FEET	VOLUME:	27.235 mL
RATIO:	1.46:1	FORWARD:	27.235 mL
DROP BRUSH:	32 FEET	REVERSE:	0 mL
TANKS:	GLIDE	PUMP:	MULTI

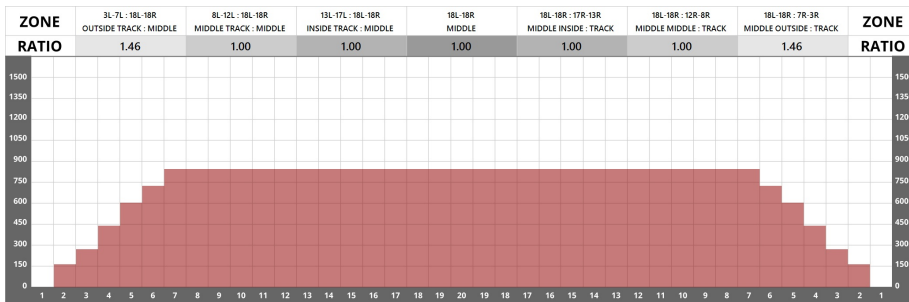

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	2L	2R	3	55	10	0 → 3	6,105
2	3L	3R	2	55	10	3 → 6	3,850
3	4L	4R	3	55	10	6 → 10	5,445
4	5L	5R	3	55	10	10 → 14	5,115
5	6L	6R	2	60	14	14 → 18	3,480
6	7L	7R	2	60	14	18 → 22	3,240
7	2L	2R	0	55	18	22 → 29	0
8	2L	2R	0	55	22	29 → 32	0
9	2L	2R	0	55	26	32 → 35	0


REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	2L	2R	0	55	30	32 → 23	0
2	2L	2R	0	55	18	23 → 10	0
3	2L	2R	0	55	10	10 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

Created Jun 17, 2026 - Rendered for Atlas.

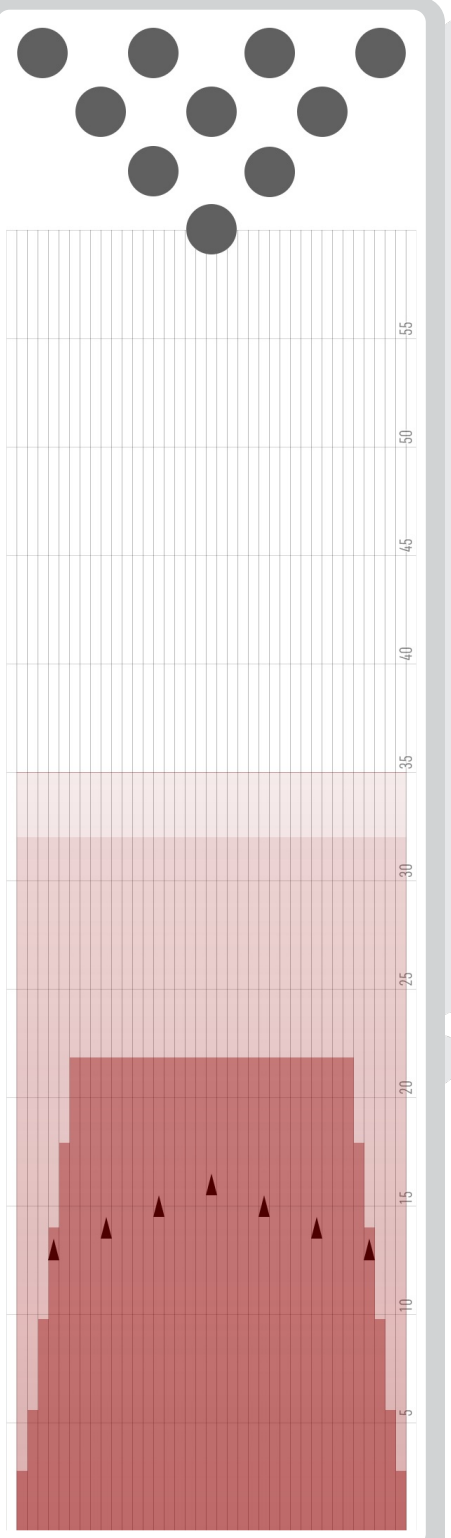

SCAN QR CODE FOR
MORE PATTERNS ON
KEGEL PATTERN
LIBRARY



KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET