




U16G FINAL ADVANCERS (CONCORD LANES)



DISTANCE:	46 FEET	VOLUME:	28.605 mL
RATIO:	1.80:1	FORWARD:	18.825 mL
DROP BRUSH:	44 FEET	REVERSE:	9.78 mL
TANKS:	GLIDE & GLIDE	PUMP:	MULTI

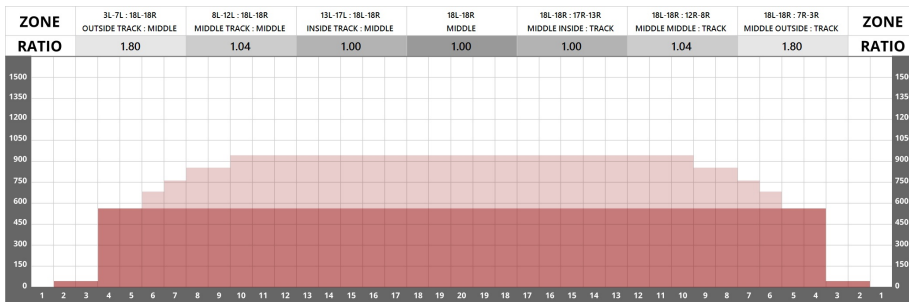

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	2L	2R	1	45	18	0 → 0	1,665
2	4L	4R	5	40	18	0 → 13	6,600
3	4L	4R	8	40	22	13 → 37	10,560
4	2L	2R	0	45	26	37 → 46	0


REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	2L	2R	0	45	30	44 → 43	0
2	2L	2R	0	45	26	43 → 41	0
3	2L	2R	0	45	22	41 → 25	0
4	10L	10R	2	45	14	25 → 21	1,890
5	8L	8R	2	45	14	21 → 17	2,250
6	7L	7R	2	40	14	17 → 13	2,160
7	6L	6R	3	40	14	13 → 7	3,480
8	2L	2R	0	45	10	7 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

Created Jun 17, 2026 - Rendered for Atlas.

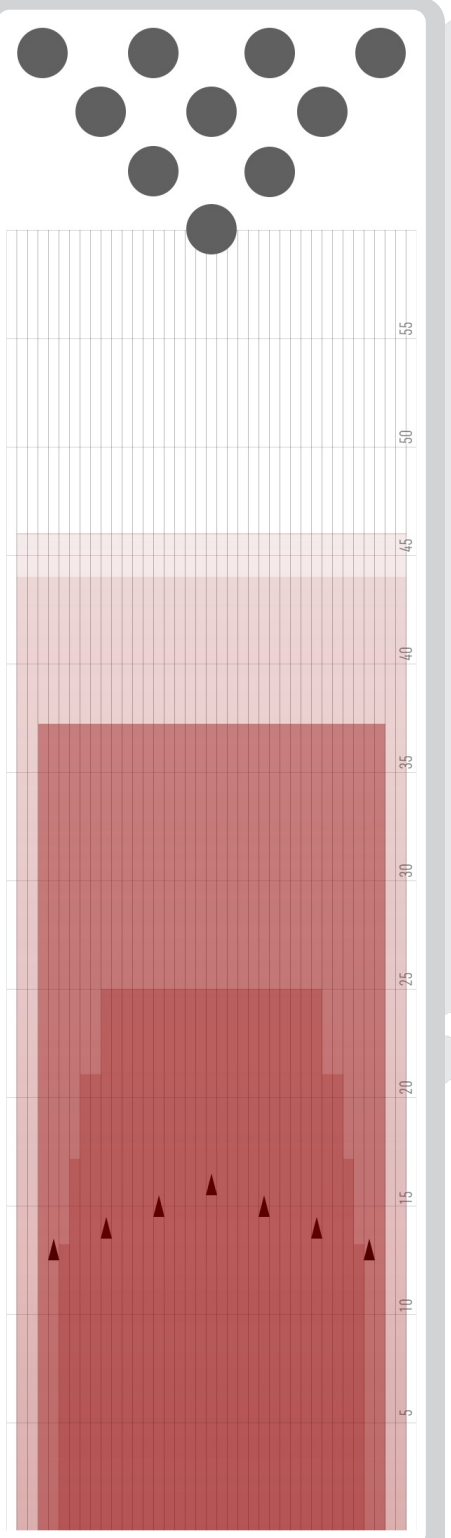

SCAN QR CODE FOR
MORE PATTERNS ON
KEGEL PATTERN
LIBRARY



KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET