

2016 - 1 - ISC Men's Singles (Wichita)




					Anny THMES One Sussing
Oil Pattern Distance	38	Reverse Brush Drop	38	Oil Per Board	Multi ul
Forward Oil Total	13.74 mL	Reverse Oil Total	14.94 mL	Volume Oil Total	28.68 mL
Tank Configuration	N/A	Tank A Conditioner	FIRE	Tank B Conditioner	ICE

	START	STOP	LOAD5	MICS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	3	60	10	3	Α	111	0.0	2.8	2.8	6660
2	6L	6R	2	60	10	3	Α	58	2.8	5.6	2.8	3480
3	10L	10R	2	60	10	3	Α	42	5.6	8.4	2.8	2520
4	16L	16R	2	60	10	3	Α	18	8.4	11.2	2.8	1080
5	2L	2R	0	60	10	3	Α	0	11.2	15.0	3.8	0
6	2L	2R	0	60	14	3	Α	0	15.0	20.0	5.0	(
7	2L	2R	0	60	18	2	Α	0	20.0	25.0	5.0	(
8	2L	2R	0	60	22	3	Α	0	25.0	30.0	5.0	(
9	2L	2R	0	60	26	2	Α	0	30.0	34.0	4.0	(
10	2L	2R	0	60	30	1	Α	0	34.0	38.0	4.0	0

2 2L 2R 0 60 26 2 B 0 36.0 34.0 -2.0 (3 2L 2R 0 60 22 3 B 0 34.0 32.0 -2.0 (4 2L 2R 0 60 18 3 B 0 32.0 30.0 -2.0 (5 14L 14R 2 60 18 3 B 26 30.0 24.9 -5.1 156(6 8L 8R 2 60 18 3 B 50 24.9 19.8 -5.1 300(7 4L 4R 3 60 18 3 B 99 19.8 12.2 -7.6 594(8 2L 2R 2 60 18 3 B 74 12.2 7.1 -5.1 444(START	STOP	LOADS	MICS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
3 2L 2R 0 60 22 3 B 0 34.0 32.0 -2.0 (4 2L 2R 0 60 18 3 B 0 32.0 30.0 -2.0 (5 14L 14R 2 60 18 3 B 26 30.0 24.9 -5.1 156(6 8L 8R 2 60 18 3 B 50 24.9 19.8 -5.1 300(7 4L 4R 3 60 18 3 B 99 19.8 12.2 -7.6 594(8 2L 2R 2 60 18 3 B 74 12.2 7.1 -5.1 444(1	2L	2R	0	60	30	1	В	0	38.0	36.0	-2.0	0
4 2L 2R 0 60 18 3 B 0 32.0 30.0 -2.0 0 5 14L 14R 2 60 18 3 B 26 30.0 24.9 -5.1 1560 6 8L 8R 2 60 18 3 B 50 24.9 19.8 -5.1 3000 7 4L 4R 3 60 18 3 B 99 19.8 12.2 -7.6 5940 8 2L 2R 2 60 18 3 B 74 12.2 7.1 -5.1 4440	2	2L	2R	0	60	26	2	В	0	36.0	34.0	-2.0	0
5 14L 14R 2 60 18 3 B 26 30.0 24.9 -5.1 1566 8L 8R 2 60 18 3 B 50 24.9 19.8 -5.1 3006 7 4L 4R 3 60 18 3 B 99 19.8 12.2 -7.6 5946 8 2L 2R 2 60 18 3 B 74 12.2 7.1 -5.1 4446	3	2L	2R	0	60	22	3	В	0	34.0	32.0	-2.0	0
6 8L 8R 2 60 18 3 B 50 24.9 19.8 -5.1 3000 7 4L 4R 3 60 18 3 B 99 19.8 12.2 -7.6 5940 8 2L 2R 2 60 18 3 B 74 12.2 7.1 -5.1 4440	4	2L	2R	0	60	18	3	В	0	32.0	30.0	-2.0	0
7 4L 4R 3 60 18 3 B 99 19.8 12.2 -7.6 5940 8 2L 2R 2 60 18 3 B 74 12.2 7.1 -5.1 4440	5	14L	14R	2	60	18	3	В	26	30.0	24.9	-5.1	1560
8 2L 2R 2 60 18 3 B 74 12.2 7.1 -5.1 4440	6	8L	8R	2	60	18	3	В	50	24.9	19.8	-5.1	3000
	7	4L	4R	3	60	18	3	В	99	19.8	12.2	-7.6	5940
9 2L 2R 0 60 10 3 B 0 7.1 0.0 -7.1	8	2L	2R	2	60	18	3	В	74	12.2	7.1	-5.1	4440
	9	2L	2R	0	60	10	3	В	0	7.1	0.0	-7.1	0

Cleaner Ratio Main Mix 5:1
Cleaner Ratio Back End Mix 5:1
Cleaner Ratio Back End Distance 59
Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50

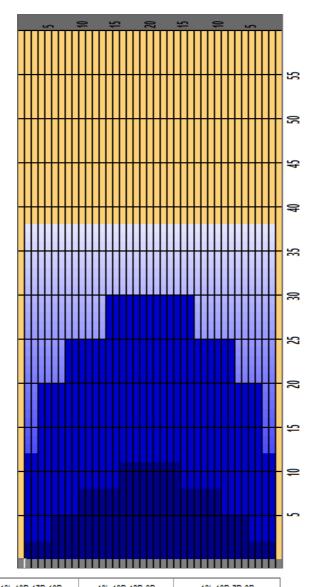

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	MIddle: Inside Track	Middle:Middle Track	Middle:Outside Track
rack Zone Ratio	2.2	1.36	1.1	1.1	1.36	2.2
1500						
1350						
900						
750 -						
300						
150	┱╌┇╌┇╌╏╌		▝▊╌┠╌┠╌╏╌			· II · II · II · II · · · · · · · · · · · · · · · · · ·